

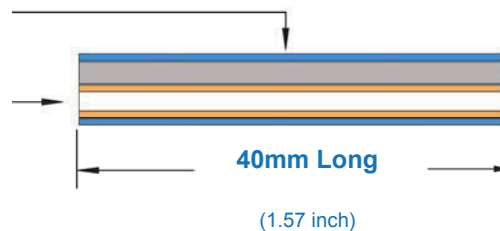





### PS-99-X40C

12 Ribbon Fiber fusion splice protector sleeve

### Product Dimensions

Sleeve Diameter After Shrinkage	<b>3.75-4.75 mm</b> (0.15 x 0.19 inch)
Supplied Internal Rectangular Bore	<b>3.5 x 1.0 mm</b> (0.14 x 0.04 inch)
Ribbon fiber size	<b>1-12 Way</b>
Reinforcing Member	<b>White Ceramic Rod</b>
Color	<b>Clear</b>
Package Quantity	<b>Bag 50</b>



-  Heat Shrink Outer Polyolefin Tube
-  Hot-Melt Adhesive Inner Tube
-  Ceramic Reinforcing Rod

### Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- White Ceramic reinforcing member
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most ribbon fibers, splice trays and ribbon splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

